

SPA and swim spa installation steps


Step 1: Find out the location of the contro box, acording to the installation drawing map. (Control box is inside the cabinet. Unscrew 3 screws can open the canbinet. If there is an optional speakers, please take out the cabinet and put it on the ground first, and then disconnect the speakers' wires before moving the cabient aside.)



Step 2: Open the control box and connect the wiring according to the circuit diagram on the back of the control box cover(The jumper has been adjusted according to the voltage and frequency provided by the order. If the voltage doesn't need to be changed, tenichian just need to connect the power wire in.)




Step 3: If the drawings on the back of the control box cover mentioned in step 2 is not clear enough, please check the control box model above the control box, and then connect power wire according to the guides below

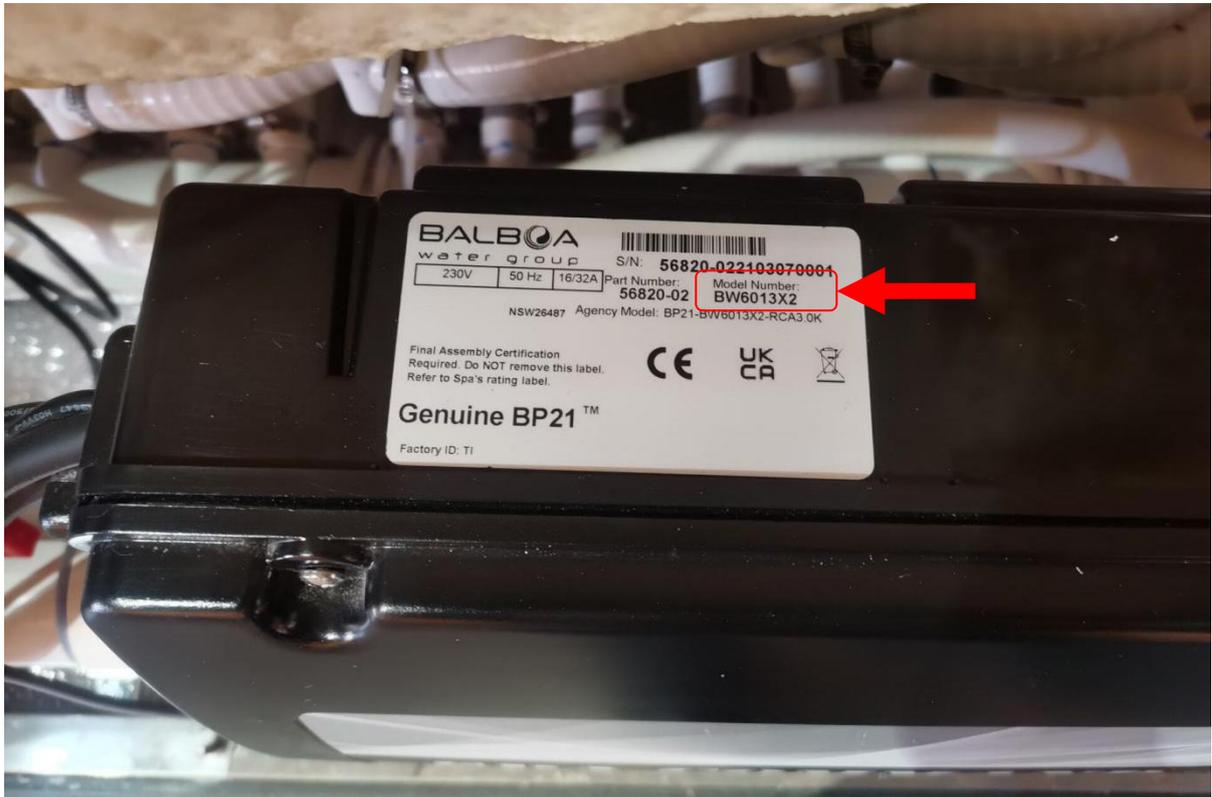

110V接线


220V接线

220V接线

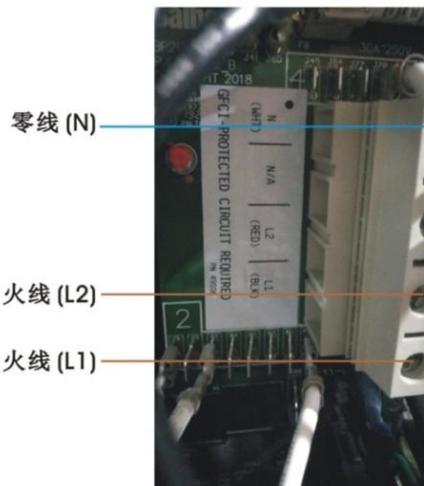

BP2000G1

J20 connect to J37(连接)
J38 connect to J42(连接)
A2.UP

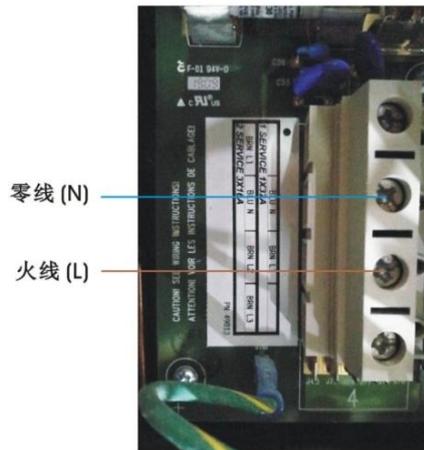

BP21P4BC

J41 connect to J12(连接)
J60 connect to J36(连接)
J51 connect to J88(连接)
J52 connect to J62(连接)
A2.UP
A5.UP




BP2100G0 BP2100G1


BP6013G1 BP6013G3

J41 connect to J53(连接)
J60 connect to J12(连接)
J51 connect to J58(连接)
J52 connect to J36(连接)
A2.UP
A5.UP


380V接线

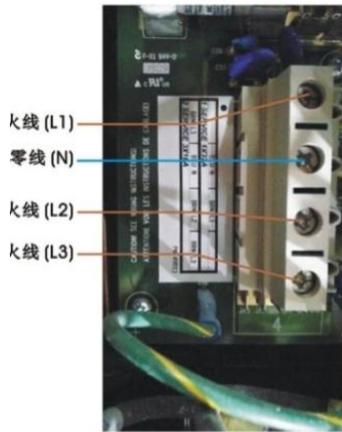


BP21P4BC




380V接线

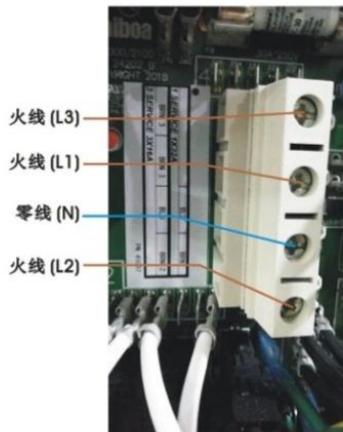

BP2100G0 BP6013G1



380V接线

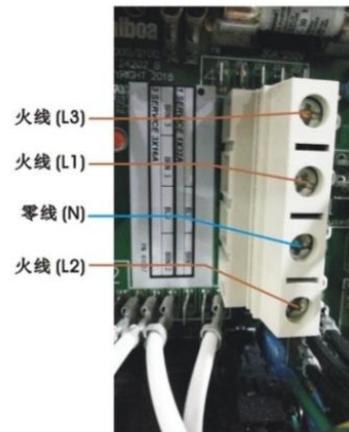

BP2100G1 BP6013G3



Put A2 and A5 down(关掉)
J60 connect to J79, J41 connect to J54(连接)
Take out two wires(拔掉):J51to J88, J52toJ62

Put A2 and A3 Up (打开), Put A5 Down (关掉)
J41 connect to J54(连接), J60 connect to J45(连接)
take out two wires(拔掉):J51to J58, J52toJ36

PutA2, A3 and A5 Down (关掉)
J41 connect to J54(连接), J60 connect to J45(连接)
take out two wires(拔掉):J51to J58, J52toJ36



YE-5.H3.0

1 PHASE:L1-N-G 一组入线	连接 P37-P49 P50-P26
3 PHASE:L1-L2-L3-N-G 三组入线	连接 P37-P38 P50-P49




YE-3.H3.0

1 PHASE:L1-N-G 一组入线	连接 P37-P49 P50-P26
3 PHASE:L1-L2-L3-N-G 三组入线	连接 P37-P38 P50-P49



YE-7.H3.0

1 PHASE:L1-N-G 一组入线	连接 P10-P74 P7-P13
3 PHASE:L1-L2-N-L3-G 三组入线	连接 P7-P10 P11-P13

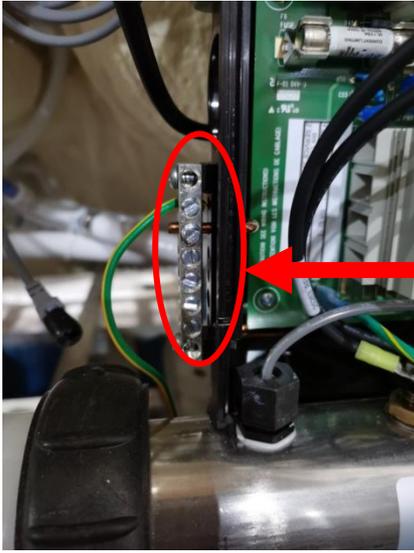

Ground wire (BALBOA)